

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 April 2005 (21.04.2005)

PCT

(10) International Publication Number
WO 2005/036727 A1

(51) International Patent Classification⁷: **H02M 7/5387**,
H02P 6/08, 6/10, 6/06

(21) International Application Number:

PCT/JP2004/010982

(22) International Filing Date: 26 July 2004 (26.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2003-350531	9 October 2003 (09.10.2003)	JP
2003-411480	10 December 2003 (10.12.2003)	JP
2004-007696	15 January 2004 (15.01.2004)	JP

(71) Applicant (for all designated States except US): MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 5718501 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): TAKADA, Masayuki.

(74) Agents: IWAHASHI, Fumio et al.; c/o Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 5718501 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: BRUSHLESS DC MOTOR COUPLED DIRECTLY TO AC SOURCE AND ELECTRIC APPARATUS USING THE SAME MOTOR

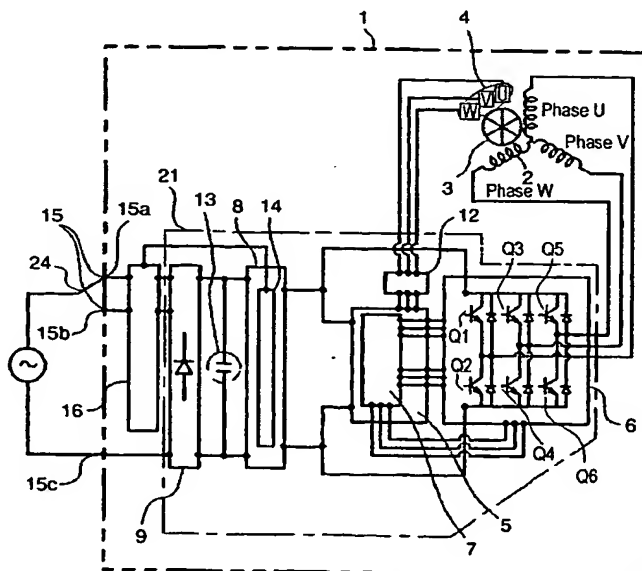

(57) Abstract: A brushless DC motor is disclosed, in which a commercial AC source is full-wave rectified by rectifier (9) and then converted into a generally flat and low DC voltage not more than 45V by DC voltage converter (8). The low DC voltage is applied in a full-wave driving method to stator coil (2) via inverter circuit (6) formed of switching elements in a bridge configuration. This structure allows obtaining the brushless DC motor coupled directly to the AC source, and the torque ripples and uneven rotation of the motor are suppressed.

WO 2005/036727 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.